

# Commercial battery storage up to 2MWh DSW BESS 261

High performance energy storage for industry, trade and agriculture –  
Your solution for a more economical and independent energy supply.



## Application Areas

- ✓ Commercial
- ✓ Industry
- ✓ Agriculture
- ✓ Residential buildings
- ✓ Supermarkets
- ✓ Critical infrastructure
- ✓ Charging infrastructure
- ✓ Biogas plants

## All advantages at a glance

- > **High storage capacity** – 261 kWh gross capacity
- > **Powerful discharge** – 125 kW peak power
- > **Durable & safe** – >6000 charging cycles, LFP technology
- > **Flexible integration** – with external German EMS
- > **Scalable** – Expandable to up to 8 systems
- > **Robust design** – protection class IP54, dust-proof
- > **Integrated safety** – monitoring of cell voltage, smoke detection & temperature monitoring
- > **High temperature tolerance** – Operation from -20 °C to +55 °C
- > **Fire & emergency protection** – Aerosol fire extinguishing system, emergency stop

Efficiency. Flexibility. Independence.



# DSW BESS 261



GENERAL DATA	
Product type	CESS-M261-EU
Battery type	Lithium iron phosphate (LFP) – liquid-cooled
Rated capacity	261 kWh
Usable capacity	255 kWh (98% of the rated capacity)*
Max. charge/discharge power	125 kW
Power connection	400 VAC, 50 Hz, 3L + N
Dimensions (WxDxH)	930 x 1400 x 2300 mm
Weight	~2500 kg
Product warranty	5 years
Performance warranty	≥70% after 6000 cycles or 10 years

ENVIRONMENTAL CONDITIONS	
Operating temperature	-20 °C to +55 °C (>45 °C in derating mode)
Relative humidity	5 % to 100 % ≤95 % (daily average); ≤90% (monthly average)
Altitude	Maximum 3000 m (>2000 m derating)
Protection level	IP54
Direct sunlight	permissible
Installation in dusty environments	permissible


SECURITY & PROTECTION	
Security features	Monitoring of cell voltage, smoke detection & temperature monitoring
Fire suppression	Aerosol
Emergency stop switch	Available
Material	Q235B-Steel (corrosion protection: C4 according to ISO 12944-2)
UPS	Integrated (max. 30 min, communication & security components only)

SCALABILITY & COMMUNICATION	
Scalability	Up to 8 systems via external EMS**
Communication	Modbus TCP/IP, Ethernet (RJ45)
Remote monitoring	Only via external Master EMS**

CERTIFICATIONS & STANDARDS	
Network compliance	VDE4105, VDE4110, EN50549
Safety & Quality standards	IEC62619, IEC63056, IEC61000-6-2/4, IEC62477-1, IEC62620, UL9540A, UL1973, IEC62933-5-2
Transport & Environment	UN38.3, UN3480, REACH, RoHS, CE

\*The usable storage capacity is 98% of the age-dependent nominal capacity. Please note the warranty conditions.  
\*\*The system can only be operated with an external master EMS (SMART Q) or with a customer-supplied EMS. Modbus protocol available.

INTERIOR VIEW/ SYSTEM STRUCTURE

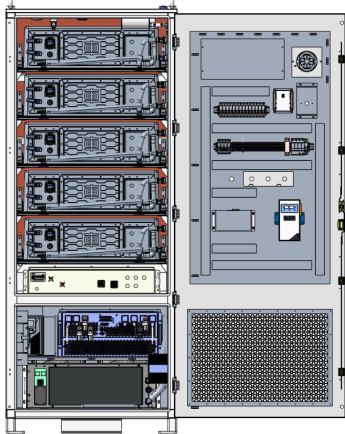

EXPANSION OPTIONS FOR THE DSW BESS 261

